

FH254-1XX-XXX

Female Header

Pitch 2.54mm



Single Row

Type1/Type2

.....

No.of Pins



Single Row:2~40

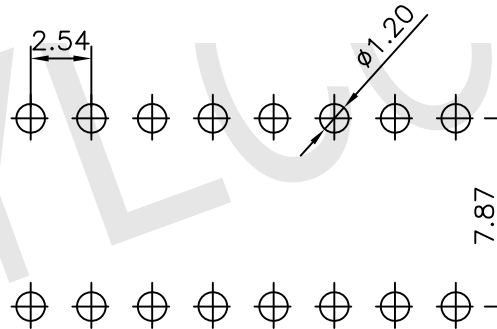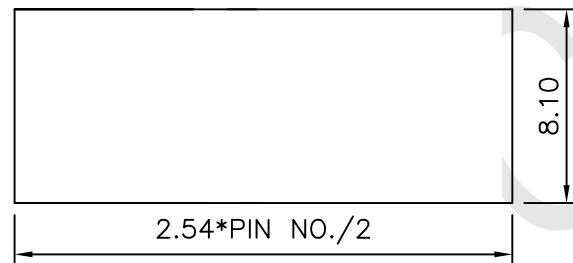

PRODUCT SPECIFICATION

1. INSULATOR MATERIAL : POLYESTER, UL94V-0 .
2. TERMINAL MATERIAL : COPPER ALLOY .
3. FINISH : GOLD OR TIN PLATED.
4. CURRENT RATING : 3 AMPERE.
5. INSULATION RESISTANCE : 1000M OHMS MIN.
6. DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
7. CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;
测试后 Final : 40 m Ohm Max. .
8. OPERATING TEMPERATURE : - 40°C to +105°C.


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	0801092016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD	
		CHEK	08Jan2016		
 THIRD ANGLE PROJECTION		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ± 0.50 1 PLC ± 0.30 2 PLC ± 0.20 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°		Female Header 2.54mm*8.10mm Right Angle DIP Type	
		APVD	08Jan2016	SIZE	DRAWING No.
		Abel		A4	YL-ED-XXX
		PRODUCT SPEC	-	SCALE	1 : 1
		WEIGHT	-	SHEET	1 of 1
		CUSTOMER DRAWING			

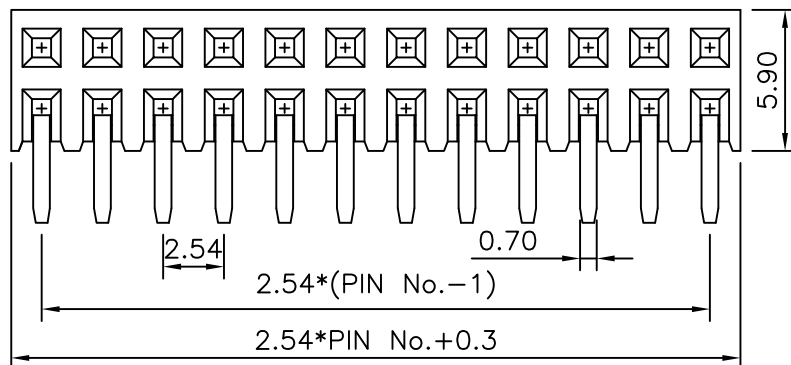

FH254-2XX-XXX

Female Header
Pitch 2.54mm
Dual Row

Type1/Type2
.....
No.of Pins
Dual Row:2~40



PRODUCT SPECIFICATION

- 1.INSULATOR MATERIAL : POLYESTER, UL94V-0 .
- 2.TERMINAL MATERIAL : COPPER ALLOY .
- 3.FINISH : GOLD OR TIN PLATED.
- 4.CURRENT RATING : 3 AMPERE.
5. NSULATION RESISTANCE : 1000M OHMS MIN.
6. DIELECTRIC WITHSTANDING VOLTAGE : 1000 V /1 MINUTE.
7. CONTACT RESISTANCE : 初期 Initial : 20 m Ohm Max. ;
测试后 Final : 40 m Ohm Max. .
8. OPERATING TEMPERATURE : - 40°C to +105°C.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	0801092016	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO.,LTD	
		CHEK	08Jan2016		
 THIRD ANGLE PROJECTION		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ± 0.50		Female Header 2.54mm*8.10mm Right Angle	
		1 PLC ± 0.30		DIP Type	
		2 PLC ± 0.20		DRAWING No.	
3 PLC ± 0.15		APVD	08Jan2016	YL-ED-XXX	
4 PLC ± -		Abel		SCALE 1 : 1	
ANGLES ± 3°		PRODUCT SPEC		SHEET 1 of 1	
		WEIGHT			
		CUSTOMER DRAWING			